

Hardware

Standard Hardware Options

(Surface Mounted)



COLONIAL Painted Finishes Only (STANDARD)
GEORGIAN All Standard Colors
LUXEMBERG Plated Finishes Only
SEVILLE Plated Finishes Only

Upgraded Hardware: (Mortised Hardware)



STRATFORD HANDLESET

- PLATED FINISHES ONLY
- BUILT INTO DOOR
- KEYED TO MATCH
- ADJUSTABLE STRIKE PLATES
- NYLON BOLT FOR SMOOTH CLOSING
- MATCHING INTERIOR AND EXTERIOR

BLACK (PAINTED)

WHITE (PAINTED)

SATIN NICKEL (PLATED)

BRIGHT BRASS (PLATED)

OIL RUBBED BRONZE (PLATED)

Configuration Options

Double Outswing Doors

Casco's Full View, Full View with Kick Plate, Hi-Lite, and Self-Storing storm doors are all available as outswing double door configurations. Double doors include an astragal and interior head and sill surface bolts. Stratford hardware must be used in double door configurations.



Inswing Doors


All of Casco's Storm and Screen Doors are available in an inswing format. Stratford hardware must be used when ordering an inswing door product.

Made to Order Sizing

Unlike traditional storm door manufacturers, Casco storm doors are all made to order. With up to 48" wide and 96" tall, Casco is sure to be able to fabricate the door you need.

How to measure your door openings:

1. Measure width of door between the exterior brickmold. Measure the width at the top (head), center (midpoint), and bottom (sill) of the door and use the smallest dimension. This is your STORM DOOR OPENING WIDTH.
2. Measure door frame height from inside the head brickmold to sill at the left jamb, right jamb, and midpoint of the door and use the smallest dimension. This is your STORM DOOR OPENING HEIGHT.
3. Measure outside face width and depth of where your new door will be mounted. Both of these dimensions must not be less than 1-1/8" for the door frame to fit properly (see diagrams below).
4. From outside looking in, specify if your door is hinged on the right or left side

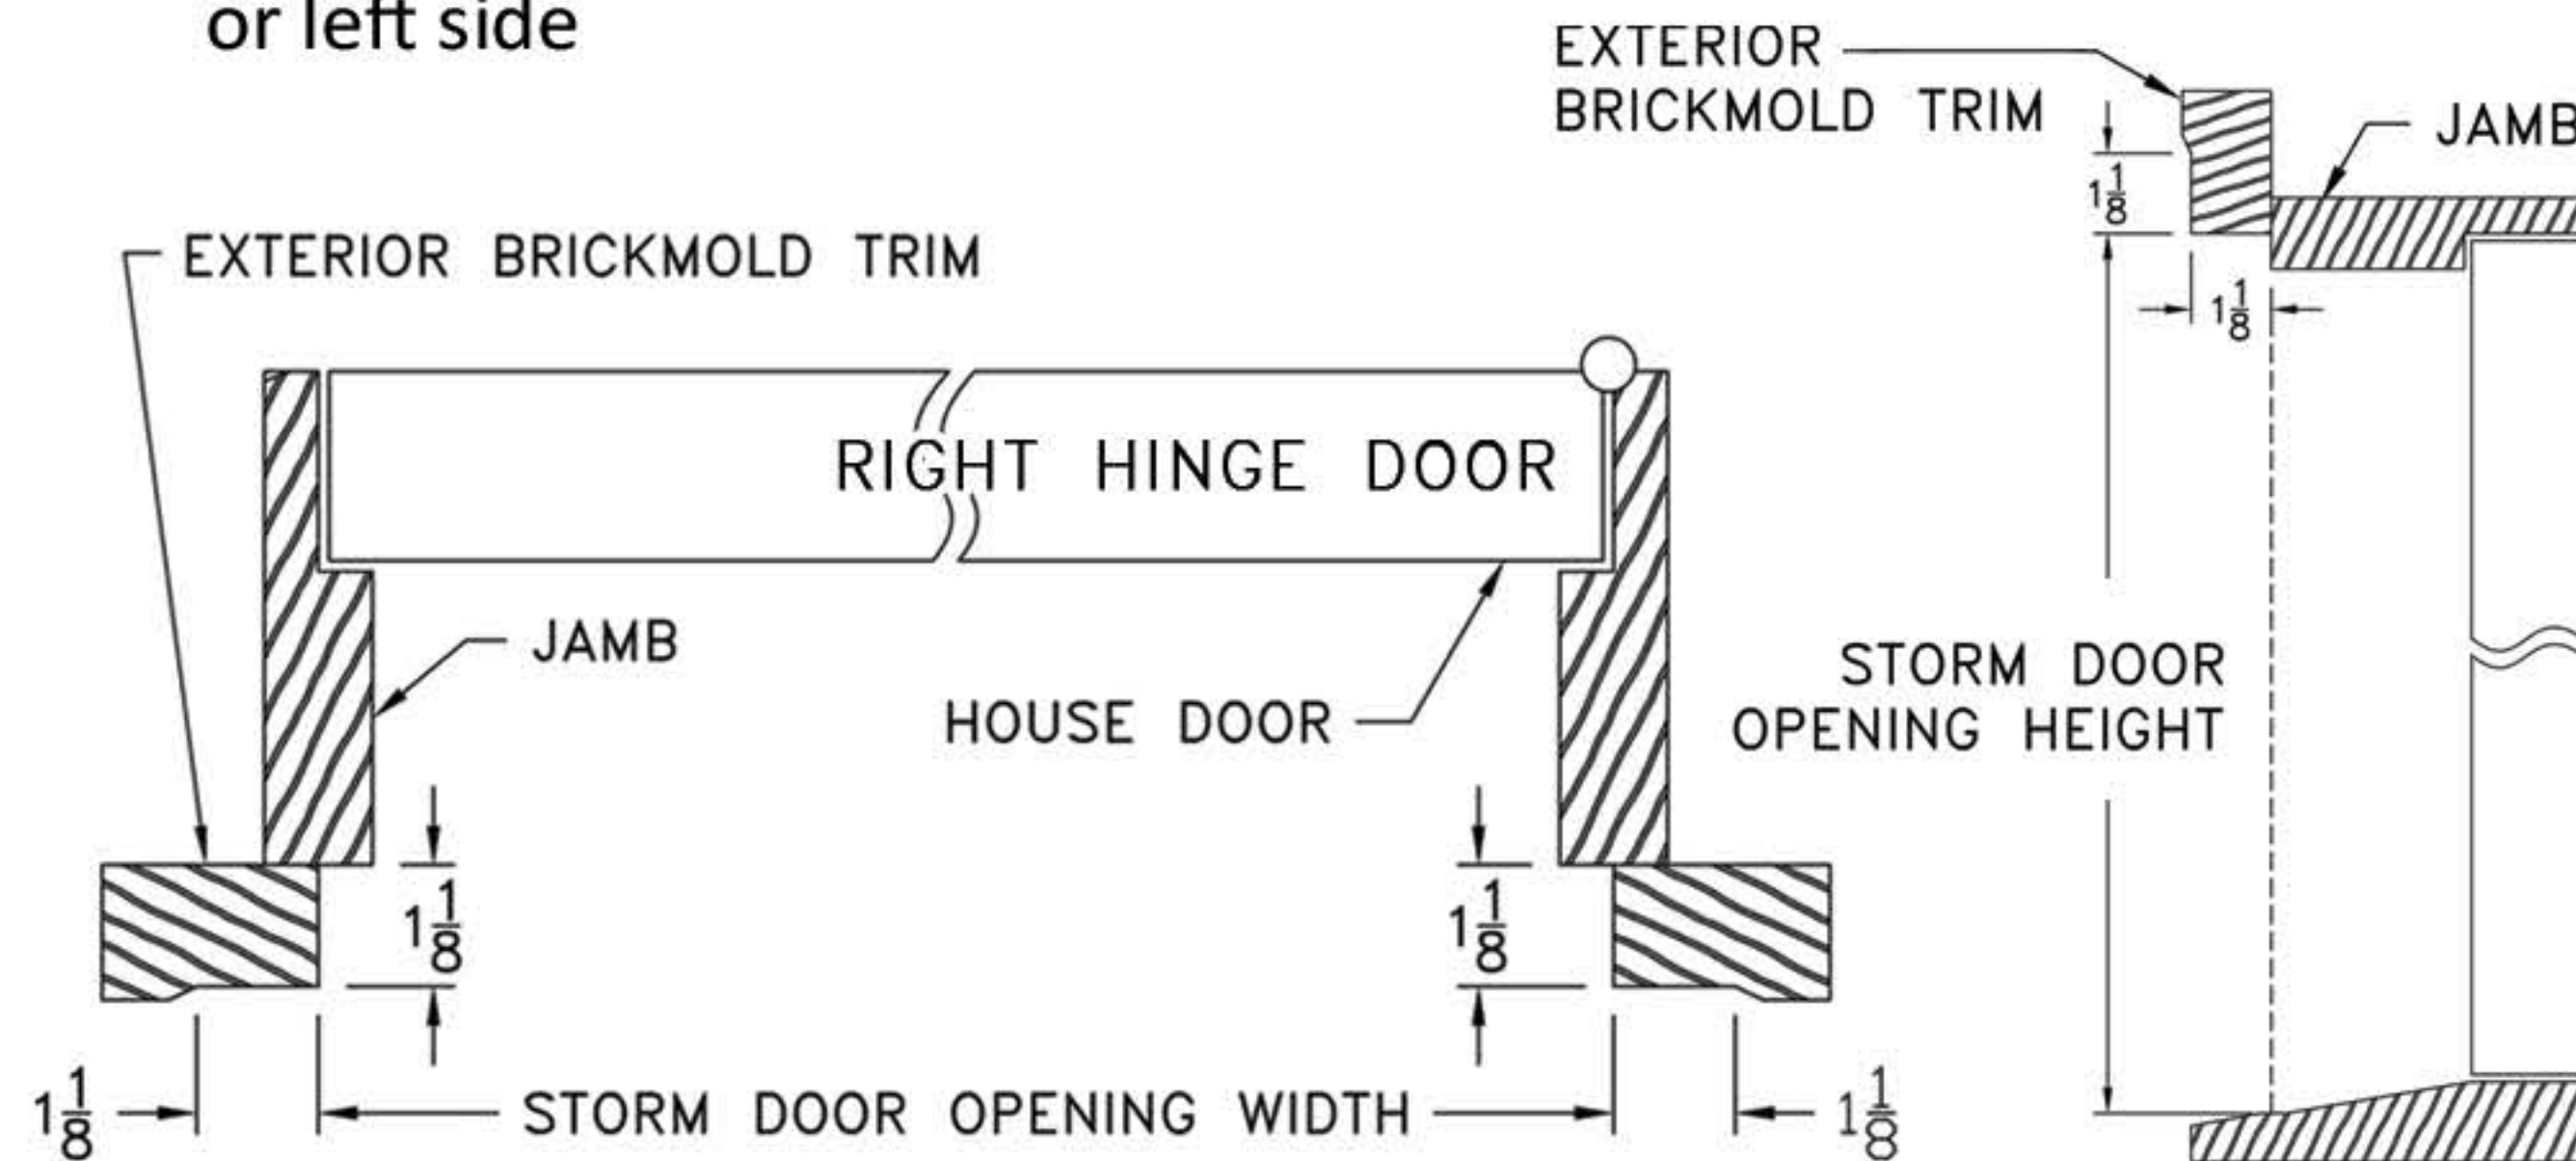


When supplying dimensions for your door, please note, Casco will only build storm doors off of an opening size. Local dealers cannot order or accept a slab or tip to tip frame size to order a Casco Storm Door. Always supply your dimensions in width x height format for accuracy of both your estimate and order. Sill expanders are accounted for in dimensions provided to Casco.

Also available from Casco Industries:

- Casco Storm Windows
- Casco Aluminum Porch Enclosure System
- Casco Multi-Brand Casement Replacement Sashes
- Casco Double Hung Replacement Kit (Sash Pack)

Talk to your local dealer to get more information on Casco Industries Storm Products.

Available at:



STORM DOORS




Casco Industries, Inc.

640 Division St., South Elgin, IL 60177
 p: (800) 806-6333 | f: (847) 741-5065
 www.cascoonline.com



Casco Industries
 Quality Building Products Since 1960

STORM DOORS

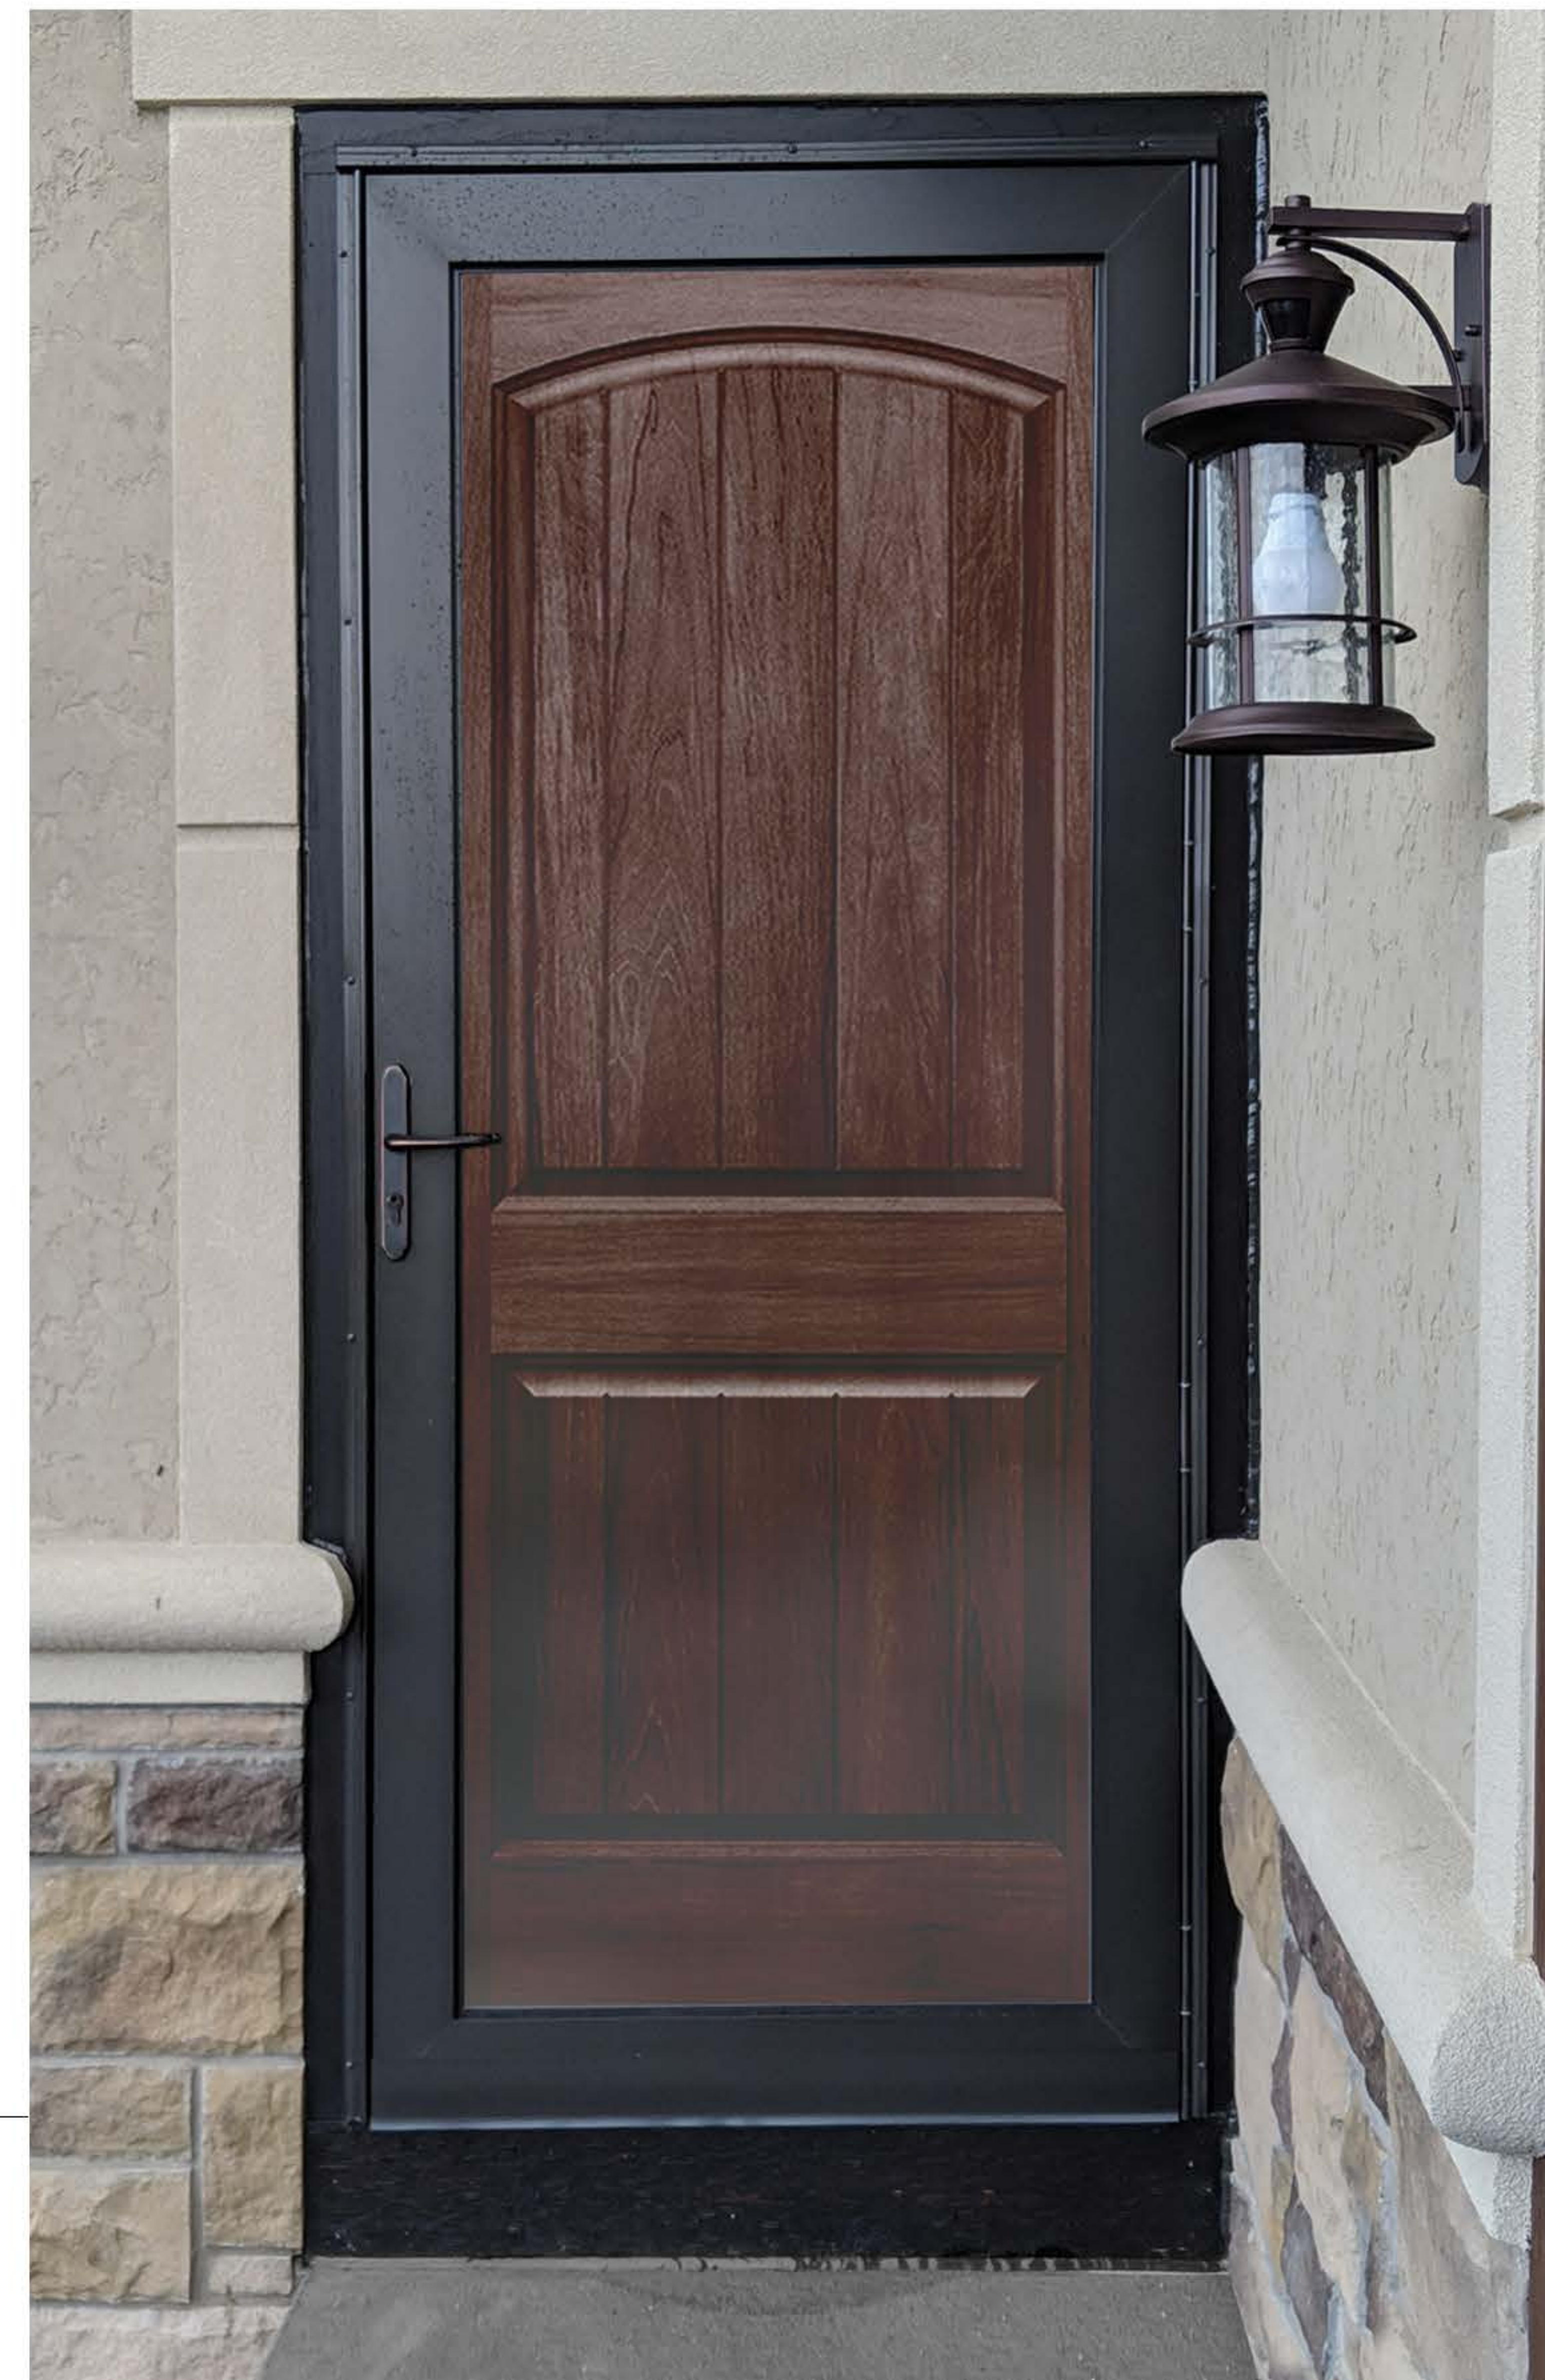



Self Storing



Screen Door



Full View



Full View
with Kick Plate



Hi - Lite

STORM DOOR MODELS

Self Storing: The Self-Storing system eliminates changing screens and storm windows — just raise to ventilate, lower to insulate.

Screen Door: Screen Doors add beauty and ventilation to any home porch. Door available with or without center mullion and kick plate as shown above. No glass included.

Full View: The Full View Door allows the beauty of your handsome entrance door to show with the options of having either a full glass panel or screen panel. Both glass and screen panels are included.

Full View with Kick Plate: With the addition of a bottom kick plate, this full view door style adds a mark of elegance to your home with rugged durability. Both glass and screen panels are included.

Hi-Lite: Large screen panel interchangeable with top glass panel. Lower screen panel also available at additional cost.

Why choose



STORM DOORS?

Standard Features

- 1-1/8" or 1" thick door
- Heavy gauge aluminum extrusions throughout
- Tempered safety glass
- Maintenance free finish
- Bottom expander for uneven sills
- Tension adjustable closure and wind chain kit
- Profiled frame for easy installation to brickmold

Each door type acts as an additional line of defense against drafty doors, dust, exterior noise, and insects.

Heavy duty extrusions ensure a long lasting product for your home.

Color and hardware options allow products to fit different project styles.

Made to order concept ensures a clean and perfect fit. No infills or unsightly trimming.

STANDARD FEATURES

- Storm Door w/Glass*
- Frame
- Hinges
- Sill Expander
- Vinyl Sweep
- Closer and Wind Chain Kit
- Screw Pack
- Hardware of choice

* Screen door does not include glass.

SCREEN OPTIONS




STANDARD SCREEN
Standard charcoal fiberglass screen



BETTERVUE
20% better airflow and optical quality
10% better insect protection



PefScreen
Tear and puncture resistant fiberglass screen

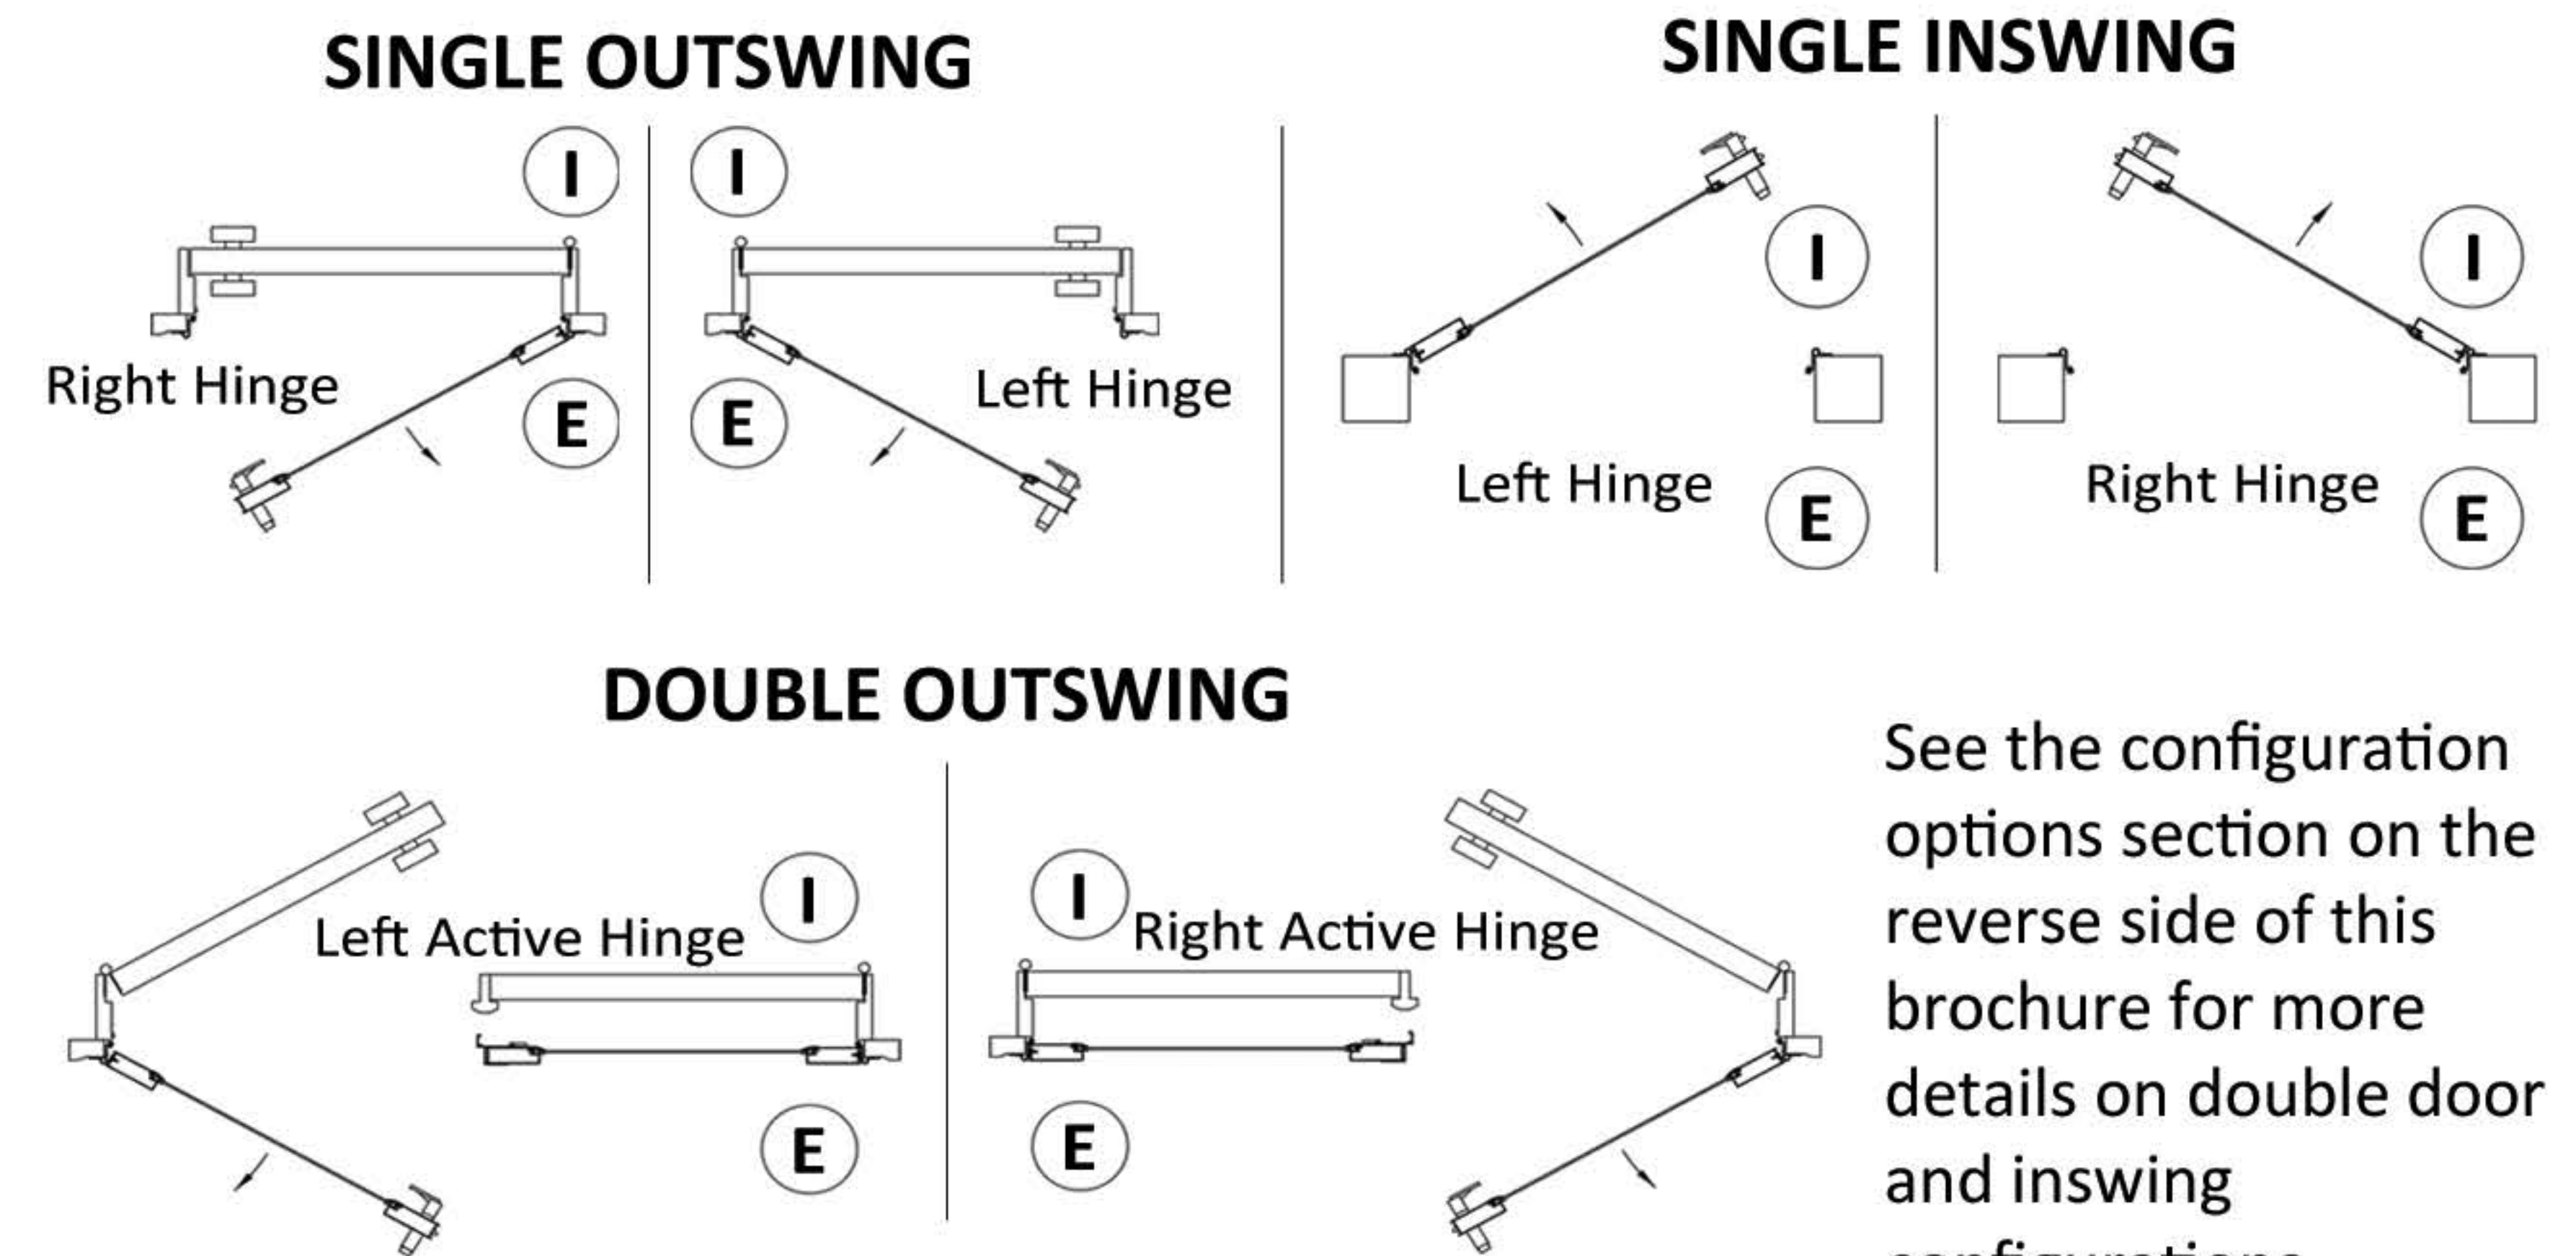

See the configuration options section on the reverse side of this brochure for more details on double door and inswing configurations.

STANDARD COLORS




ESTATE AND CUSTOM COLORS

Don't see your color? View our website to view 22 additional estate color options or let us custom color our storm doors for an exact finish match.

ENERGY EFFICIENT GLASS

CLEAR GLASS (STANDARD)

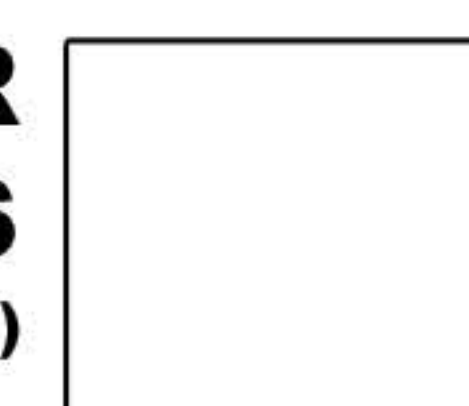

Uvalue: 1.04
SHGC: 0.87
Visible Transmission: 90%
Solar Transmission: 85%

i89 UV PROTECTION GLASS (OPTIONAL)



Uvalue: 0.65
SHGC: 0.76
Visible Transmission: 88%
Solar Transmission: 73%

GLASS OPTIONS

PLEXIGLASS
Clear acrylic

OBSCURE
Privacy glass

TINTED
Lightly tinted glass to reduce glare (available in grey, bronze, and green)

LoE-i89
UV Protection Glass designed to bounce heat back to the source.