


ALUMINUM CLAD CASEMENT standard sizes

rough opening dimension	1' 9-9/16"	2' 1-9/16"	2' 5-9/16"	2' 9-9/16"
unit dimension	1' 9-1/16" (21-1/16")	2' 1-1/16" (25-1/16")	2' 5-1/16" (29-1/16")	2' 9-1/16" (33-1/16")

custom sizes


Windows are available in any size within a 1/16" of an inch between our minimum and maximum

Width: Minimum 17-1/16" Maximum 33-1/16"
Height: Minimum 17-1/16" Maximum 73-1/16"




handing

Casement windows are unique as they swing outwards like a door and can hinge on either side. In addition, they can also be stationary and not open at all.



transom windows

Transom windows, a fixed window that is mounted on top of another window, allow additional light into a home. Windows can have single units over each window, or one large transom to cover multiple windows.

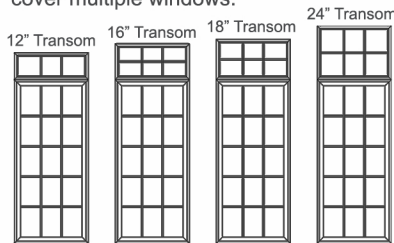

clear opening

Unit Width - 8.98" = Clear Width
Unit Height - 4.75" = Clear Height

light opening

Unit Width - 6.21" = Light Width
Unit Height - 6.23" = Light Height



rough opening

Unit Width + 1/2" = R.O. Width
Unit Height + 1/2" = R.O. Height

vent opening

Unit Width - 4.73" = Vent Width
Unit Height - 4.75" = Vent Height

GRILLE DESIGN STYLES

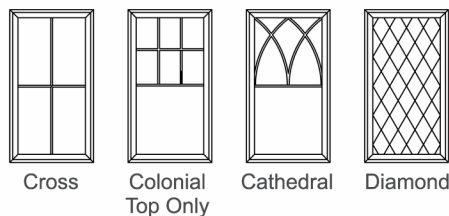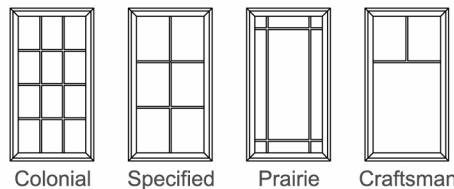

grille sizes and types

Internal (between the glass) Grille Sizes:
5/8" or 13/16" Flat, 3/4" or 1" Contour

SDL (simulated divided lite) Grille Sizes:
7/8" or 1-1/4" Simulated Divided Lite
Internal grille optional

unit numbers

Call Out Width
Window Type | Call Out Height

CC2868

2' 5-9/16"	2' 5-1/16" (29-1/16")	CC1624	CC2024	CC2424	CC2824
3' 1-9/16"	3' 1-1/16" (37-1/16")	CC1632	CC2032	CC2432	CC2832
3' 5-9/16"	3' 5-1/16" (41-1/16")	CC1636	CC2036	CC2436 ^E	CC2836 ^E
3' 11-9/16"	3' 11-1/16" (47-1/16")	CC1642	CC2042	CC2442* ^E	CC2842* ^E
4' 5-9/16"	4' 5-1/16" (53-1/16")	CC1648	CC2048	CC2448* ^E	CC2848* ^E
4' 11-9/16"	4' 11-1/16" (59-1/16")	CC1654	CC2054	CC2454* ^E	CC2854* ^E
5' 5-9/16"	5' 5-1/16" (65-1/16")	CC1660	CC2060	CC2460* ^E	CC2860* ^E
6' 1-9/16"	6' 1-1/16" (73-1/16")	CC1668	CC2068	CC2468* ^E	CC2868* ^E

Call Out Width	Two Wide Unit Dimension	Three Wide Unit Dimension	Four Wide Unit Dimension	Five Wide Unit Dimension
16	3' 6-3/16" (42-3/16")	5' 3-5/16" (63-5/16")	7' 0-7/16" (84-7/16")	8' 9-9/16" (105-9/16")
20	4' 2-3/16" (50-3/16")	6' 3-5/16" (75-5/16")	8' 4-7/16" (100-7/16")	10' 5-9/16" (125-9/16")
24	4' 10-3/16" (58-3/16")	7' 3-5/16" (87-5/16")	9' 8-7/16" (116-7/16")	12' 1-9/16" (145-9/16")
28	5' 6-3/16" (66-3/16")	8' 3-5/16" (99-5/16")	11' 0-7/16" (132-7/16")	13' 9-9/16" (165-9/16")

measurement guide

A reference guide on how to measure for new windows is available at www.cascoonline.com/measure.

* Meet or exceed a clear opening of 5.7 sq.ft. with a clear opening width of 20" and a clear opening height of 24".